


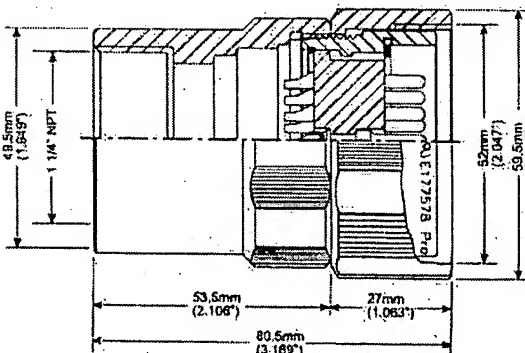


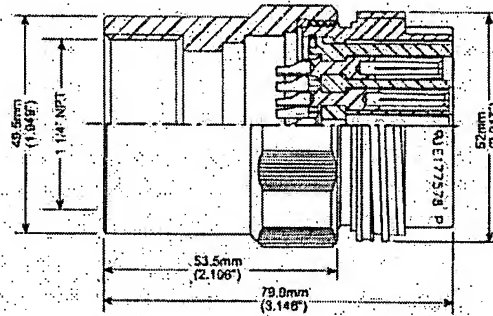

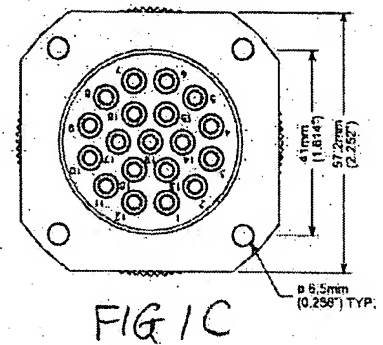
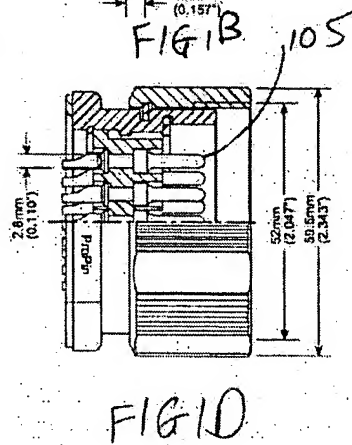


ProSeries PS19™ SPECIFICATIONS

Number of contacts	19
Rated current / voltage	AC 20A / 250V
Operating voltage limit	AC 400V
Rated voltage	AC 1500V
Insulation resistance	2000 M Ω Min.
Contact resistance	2 M Ω Max.
Operating temperature	-40 / +85°C
Terminal Wear	5000+ connections

Strain Relief Bushing Compatibility	
17mm	18x1.5mm ² Multi-Cable ProCable PC1618
23mm	18x2.5mm ² Multi-Cable ProCable PC1414
28.9mm	ProCable PC1419 ProCable PC1214 ProCable PC1214SEO ProCable PC1219 ProCable PC1014
Break-out	12/3 SJO X 6 14/3 SJO X 6

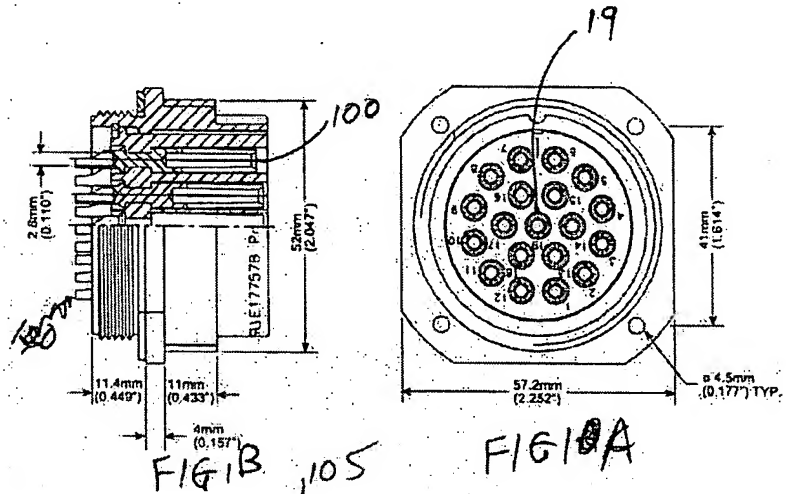

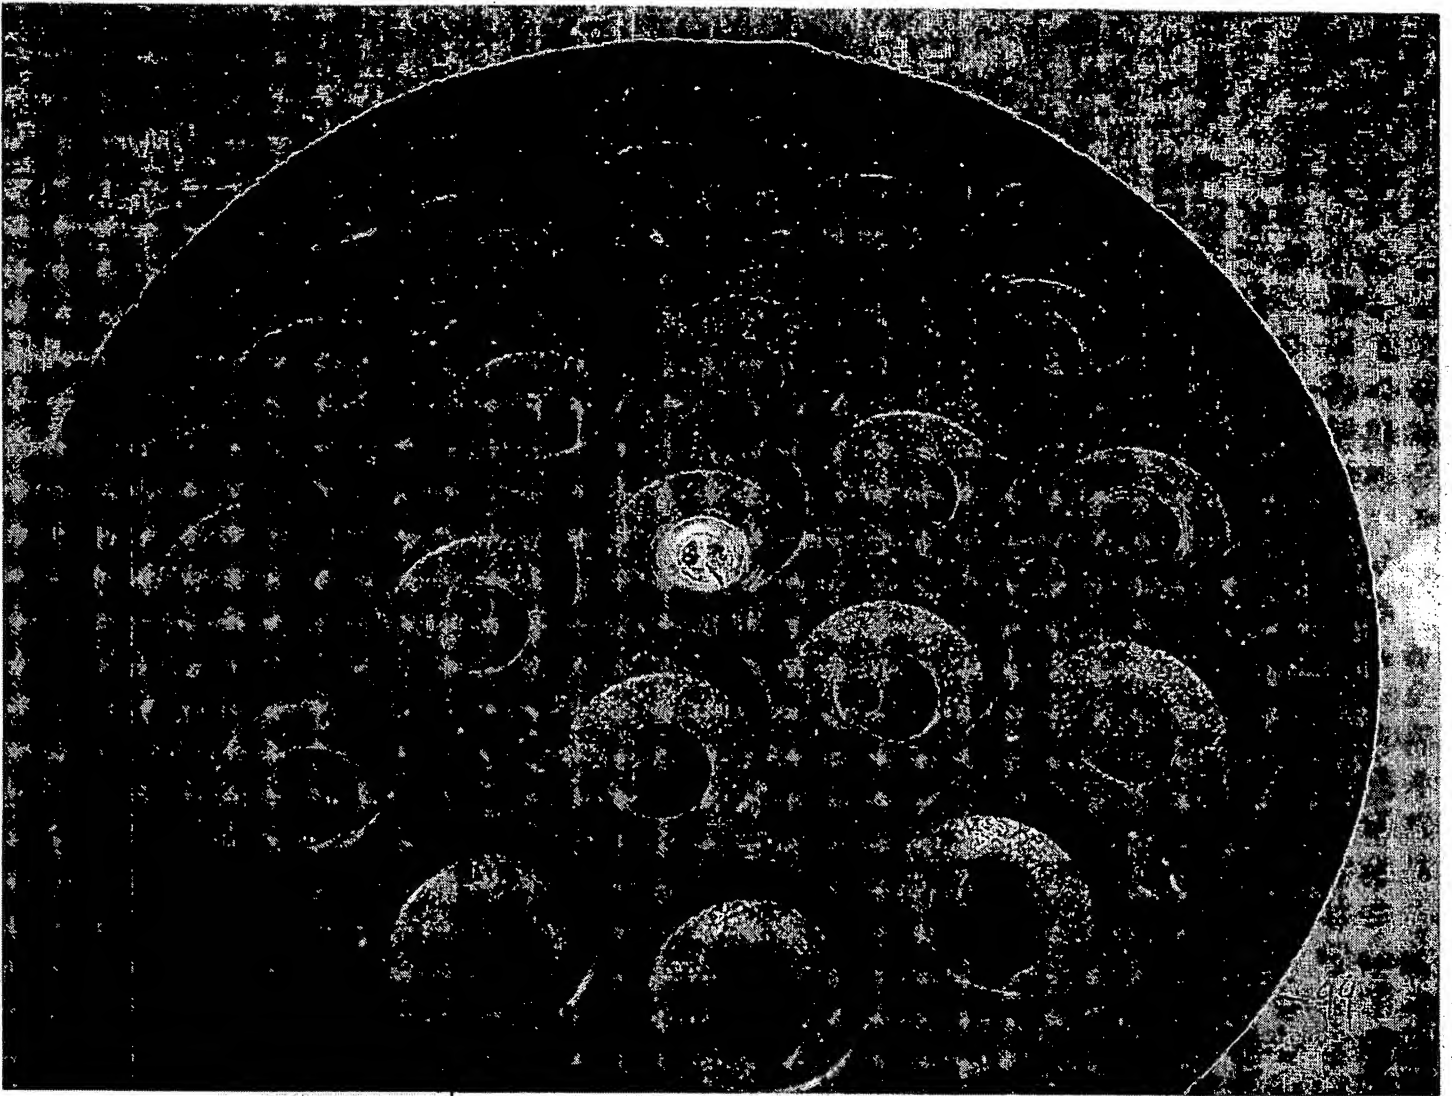

200

FIG 2

BEST AVAILABLE COPY

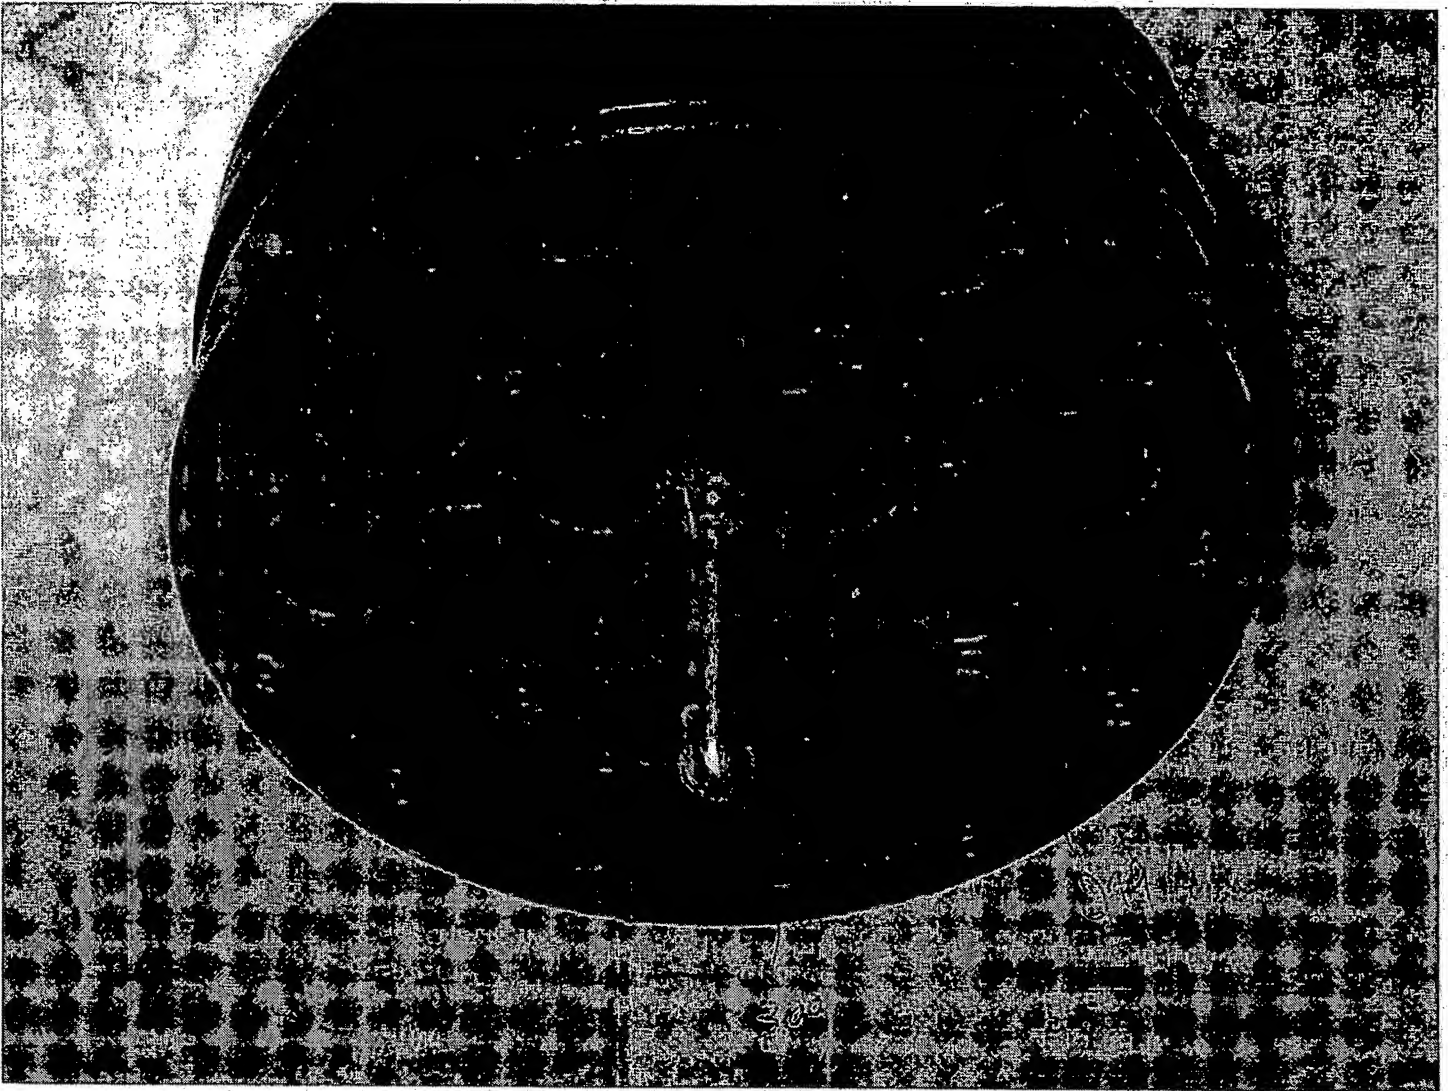


FIG 3


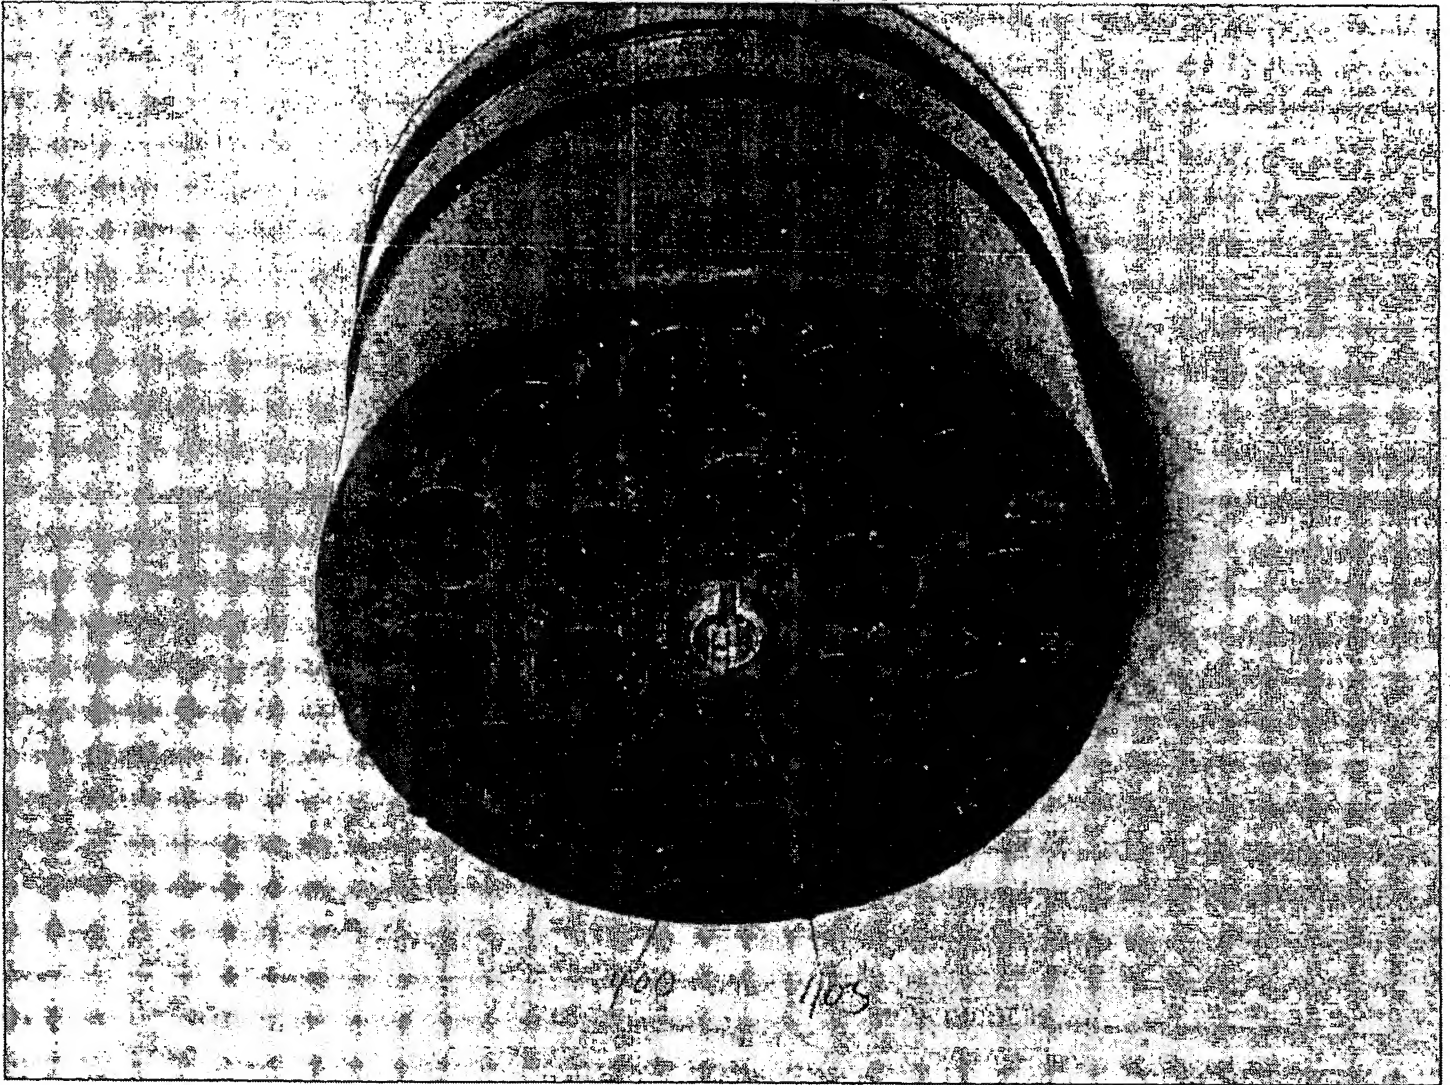


FIG 4

BEST AVAILABLE COPY

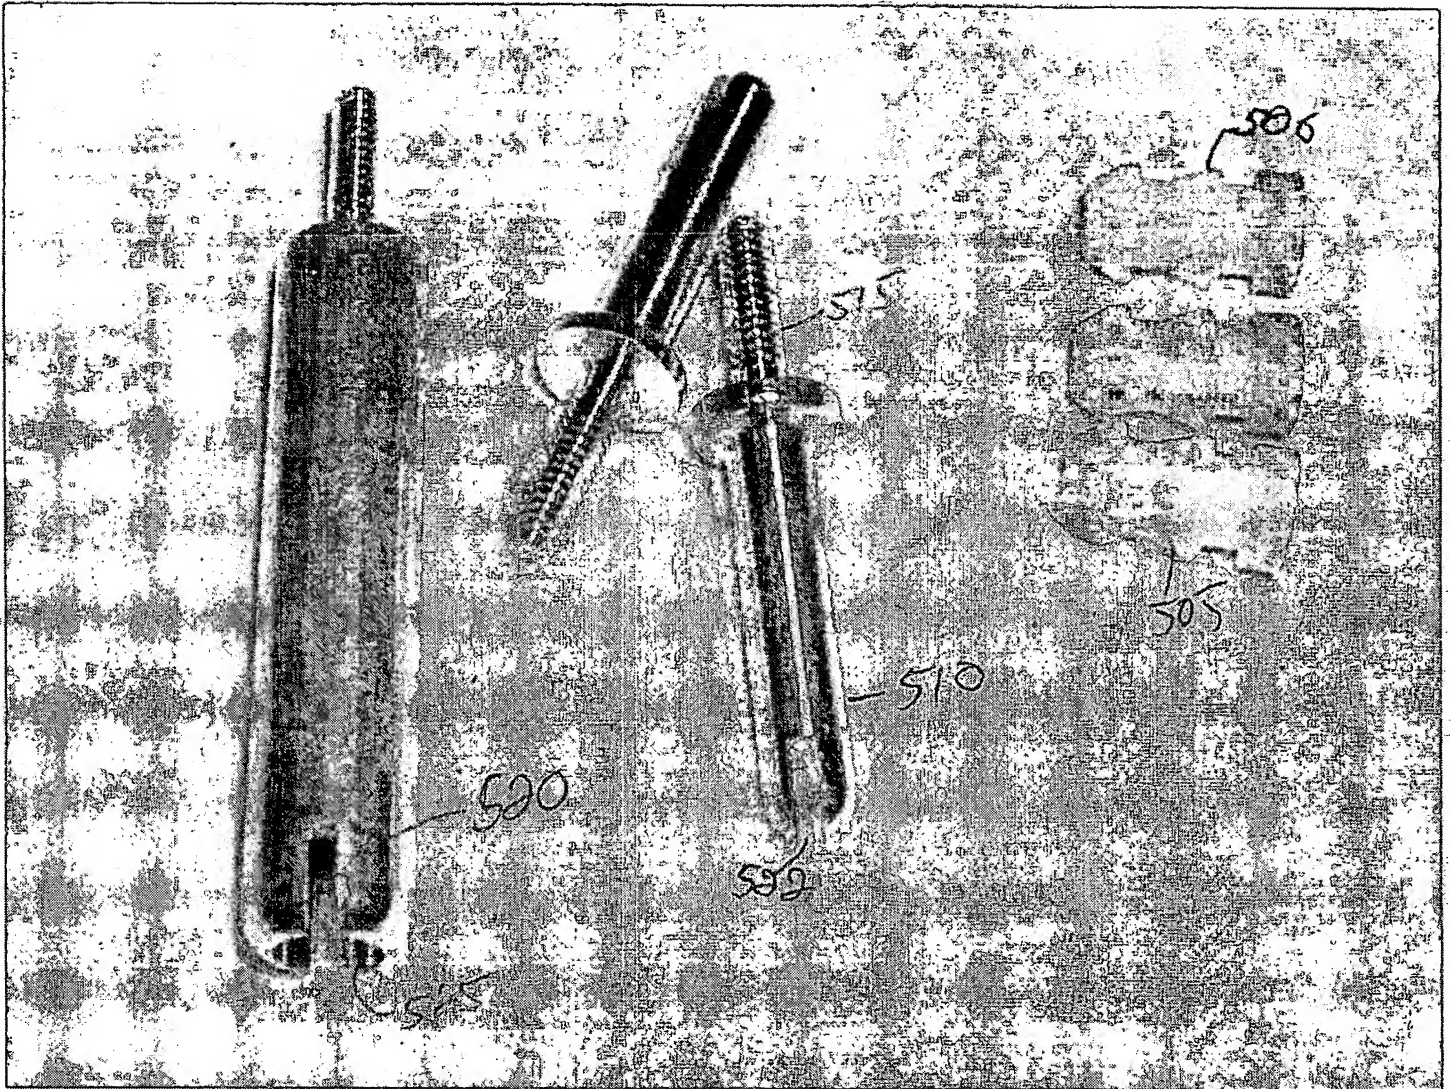

REST AVAILABLE COPY

F 165